




Wiremold
RC9AM2TC Furniture-Feed Poke-Thru Assembly, Black
Part No. RC9AM2TCBK

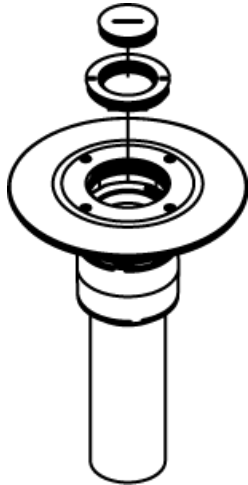

Complete with combination 1 1/4inch and 2inch trade size threaded conduit openings and closure plugs. Must be used with a conduit connector (not included) at the adapter assembly plate to maintain fire classification. Finish flange/cover assembly available in gray (GY), black (BK), and brushed aluminum (AL). NOTE: Assembled with scrub water gasket. For use on tile or carpet floors. RC9AM2TC Series Poke-Thru Devices require a 3inch (76mm) diameter hole. Not designed to work with bare concrete or terrazzo. Floor covering thickness 1/8inch minimum.

Features & Benefits

Complete with combination 1 1/4inch and 2inch trade size threaded conduit openings and closure plugs. Must be used with a conduit connector (not included) at the adapter assembly plate to maintain fire classification. Finish flange/cover assembly available in gray (GY), black (BK), and brushed aluminum (AL). NOTE: Assembled with scrub water gasket. For use on tile or carpet floors. RC9AM2TC Series Poke-Thru Devices require a 3inch (76mm) diameter hole. Not designed to work with bare concrete or terrazzo. Floor covering thickness 1/8inch minimum.

Specifications

General Info

Product Line	Wiremold	Color	Black
UPC Number	786564004899	Country Of Origin	Mexico
Application Sector	Commercial	Standard	cULus Listed Metallic Outlet Boxes: File E2961 Guide QCIT, cULus Listed Nonmetallic Outlet Boxes & Fittings Classified for Fire Resistance: File R8209 Guide CEYY Meets Article 300.21 300.22[C] &314 of NEC
Type	Poke-Thru		

Dimensions

Product Width US	7.0 in	Product Weight US	3.31 lb
Product Volume US	502.25 cu in	Product Depth US	10.25 in
Product Height US	7.0 in	Core Hole Size	3 in

Listing Agencies / 3rd Party Agencies

cULus ListingNumber	E2961	cULus Listed	Yes
---------------------	-------	--------------	-----

Buy American Act Compliance

NAFTA	Yes
-------	-----

Additional Information

RoHS Conformant	Yes
-----------------	-----

Technical Information

Cable Entry	Conduit Stub	Number of Outlets	0
-------------	--------------	-------------------	---
